
on er Pumno UPGRADE VOUR JOBSTEI

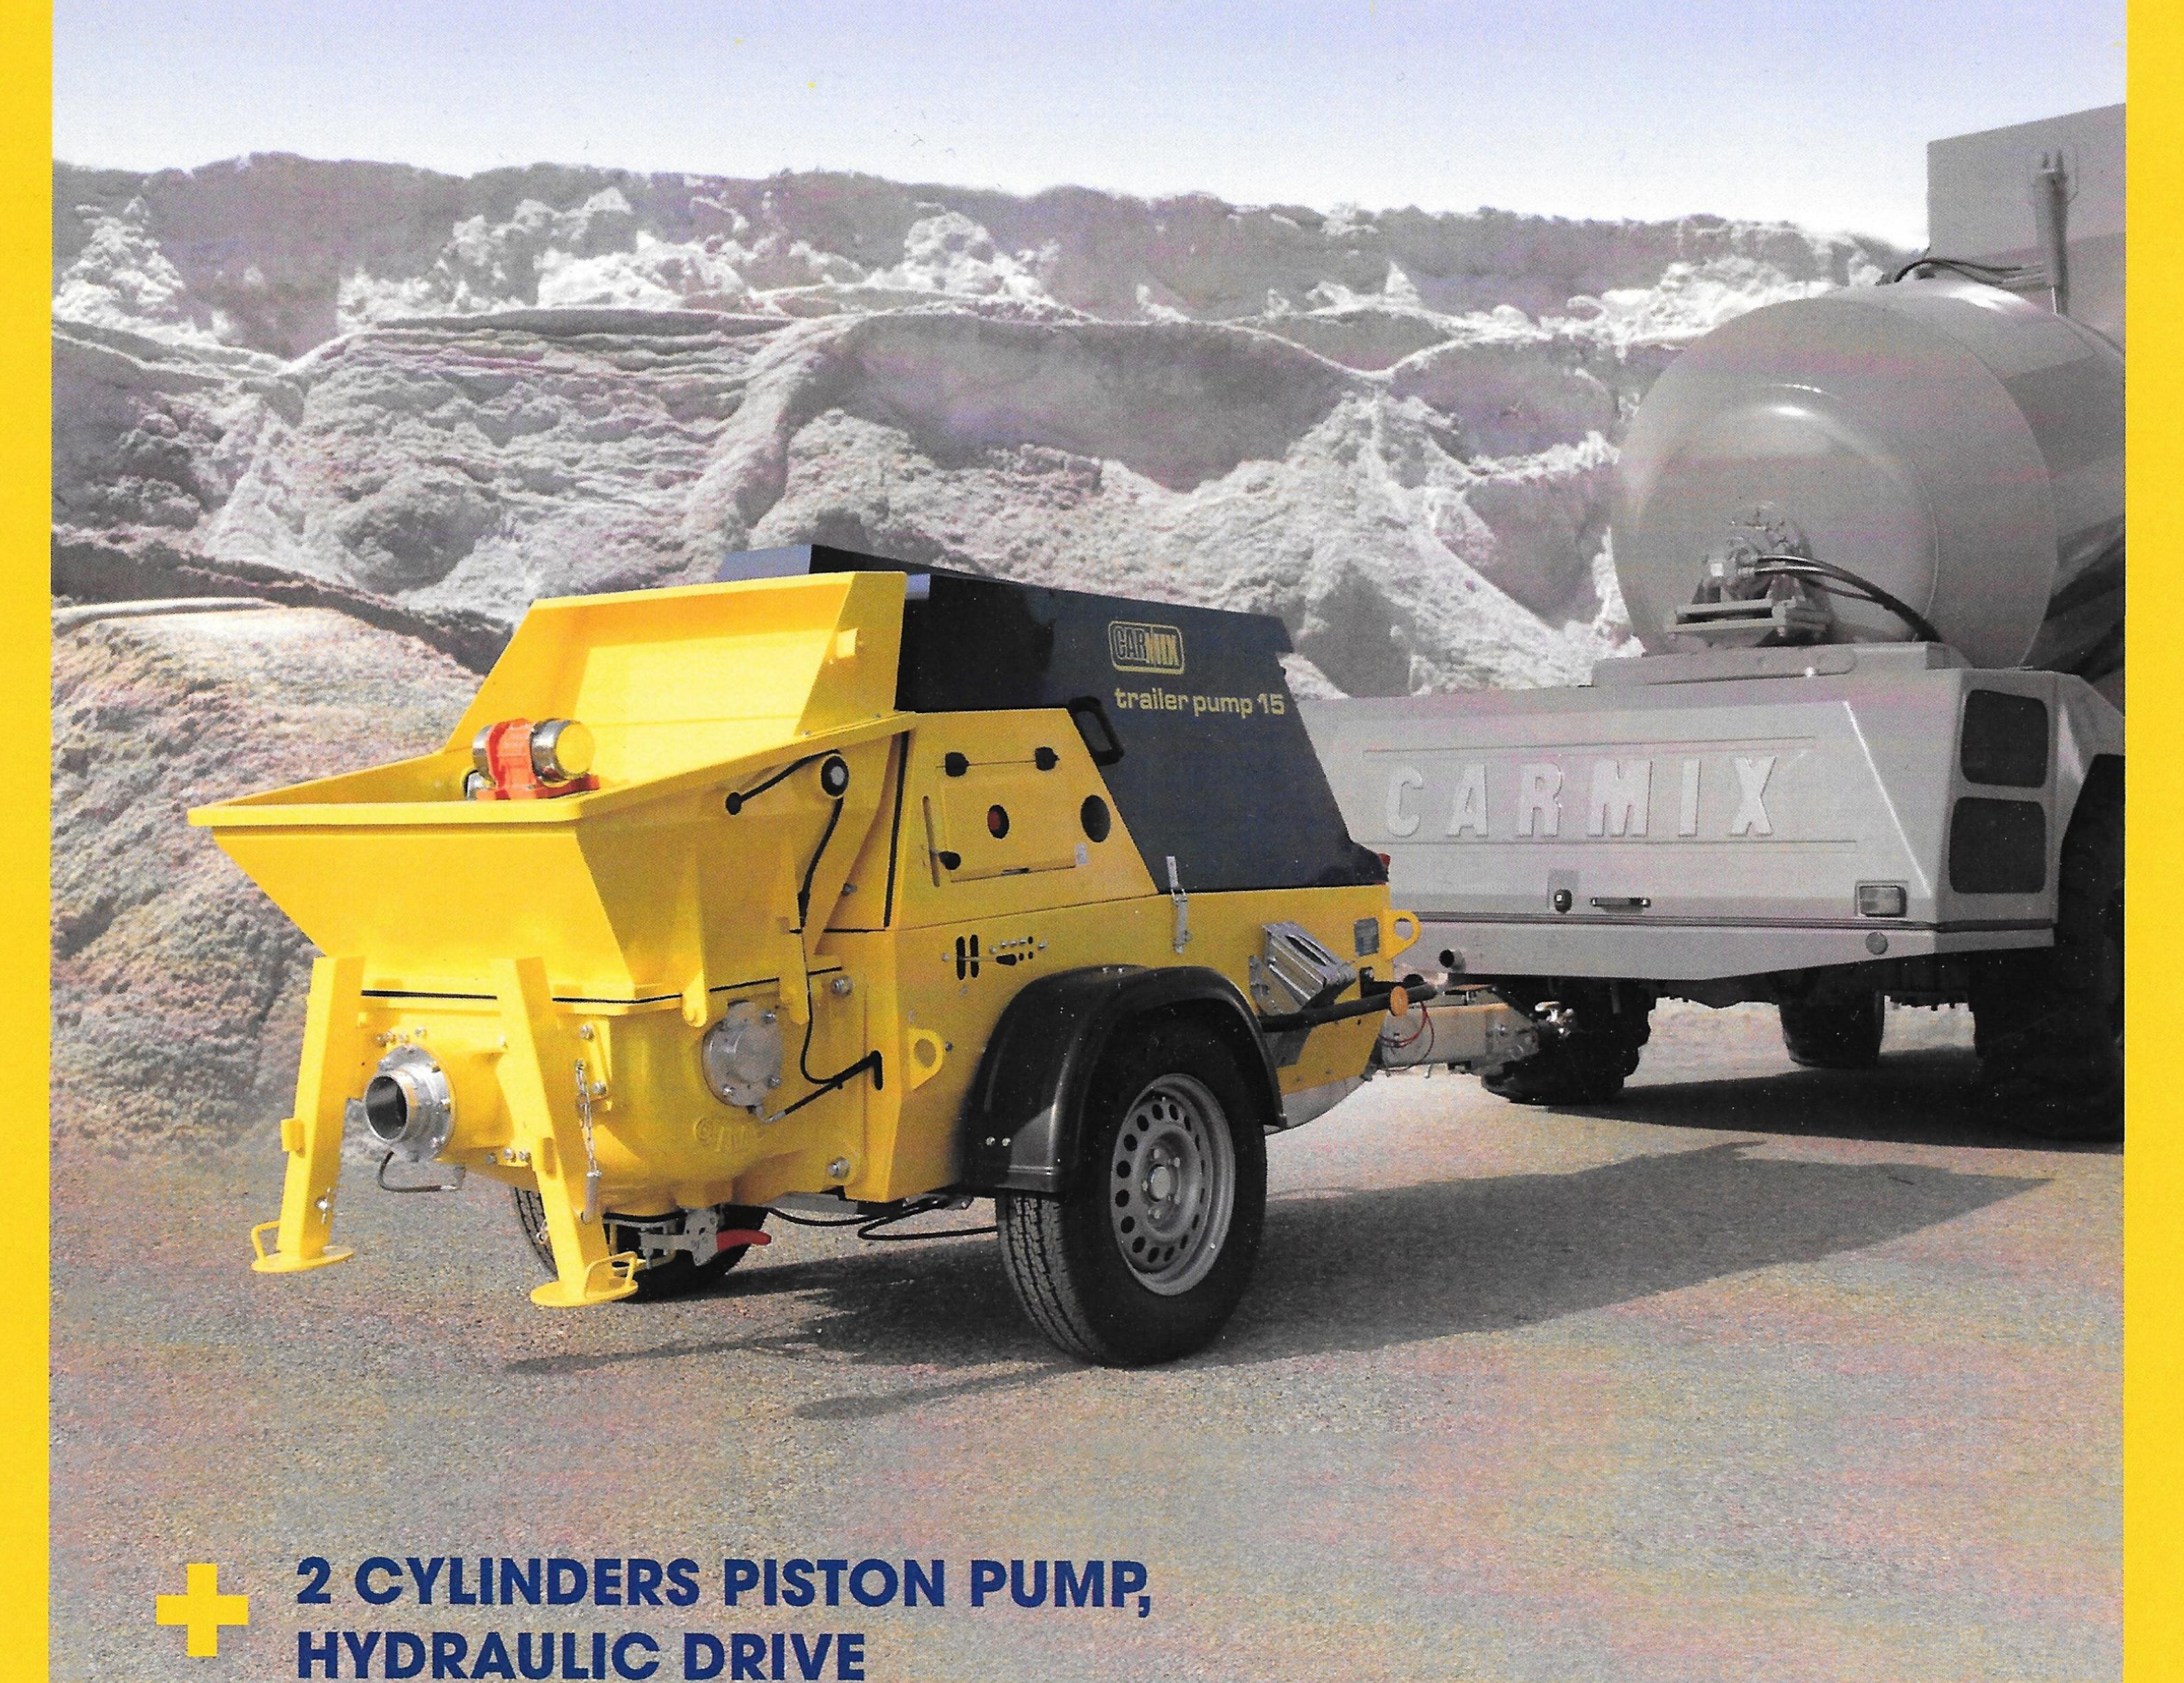

Flow rate upto 15 m³/h

Max gregate size 25 mm

Pumping pressure 70 bar

Hopper capacity 240 liters



CARMIX TrailerPump 15







BEST SOLUTION FOR PUMPING CONCRETE AND SHOTCRETING

- Yanmar 31HP 3 Cylinder liquid cooled diesel engine
- Concrete hopper with agitator
- Grid with 12V vibrator
- Pumping unit with S-Tilting valve for automatic compensation of clearance and wear
- EasySpritz system: best pumping performance also at low flow rate
- 4" Victaulic delivery manifold (= 100 mm)
- Control panel with electromechanical devices
- 4-Function wire remote control



- Road-towable unit complete with parking brake and lights
- Compact and easy to move
- Dimensions: w/l/h: 1495/4100/1540 mm
- Weight: 1550 kg



carmix.com

METALGALANTE S.p.A.

- Via A. Volta 2 Noventa di Piave (Venice) ITALY
- **T.** +39 0421 65191 **F.** +39 0421 658838
 - Skype: Carmix.main info@carmix.com



#BeACarmixMan